





Features:

- This video over fiber system is used to send 16 channels analog video signals over one fiber optic cable with FC/FC connector to remote display devices, Compatible with Singlemode fiber and Multimode fiber. Working distance: Singlemode 0~20Km(65,600ft.max).
- Support analog cameras , Automatically compatible for PAL, NTSC, SECAM Video format
- With RS-485 data (reverse direction) for remote control PTZ.
- Wavelength: Single-mode 1310/1550um (9/125um), Multimode 850um (50/125um), 1310um (62.5/125um)
- MTBF (Mean time between failure) over 100,000 Hours.
- Plug and play.

Description:

16 channels Video over Fiber Optic Media Converters - Long working distance up to 20Km by singlemode fiber. FC fiber interface, Include Transmitter and Receiver ,1 U 19" Rack mountable. For analog camera Surveillance system.

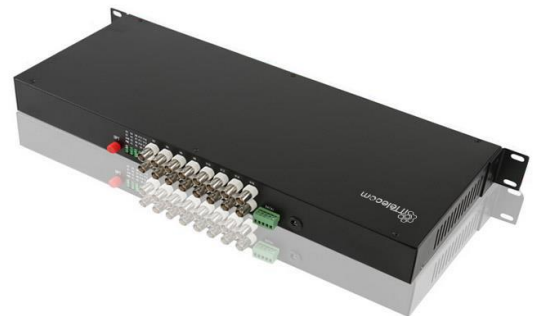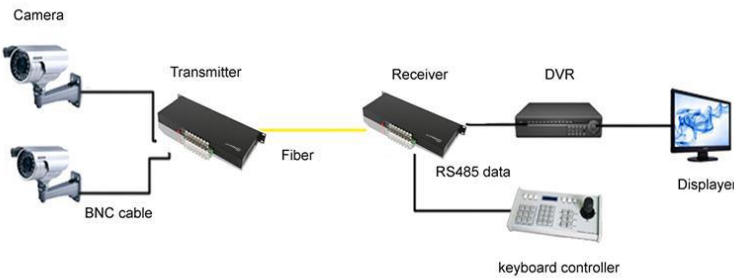

Technical Parameters:

<ul style="list-style-type: none"> • Video 	<ul style="list-style-type: none"> ➤ Support analog cameras (CVBS). ➤ Video Input / Output Impedance : 75ohm (unbalanced) ; ➤ Video Bandwidth 8MHz; ➤ Video format compatible PAL, NTSC, SECAM; ➤ Video voltage 1VP-P; ➤ Video SNR \geq 70dB. ➤ Differential gain \leq 0.7%; ➤ Differential phase \leq 0.7 °; ➤ 8- bit linear PCM coding ➤ 15MHZ high-speed sampling ; ➤ Video Interface: BNC;
<ul style="list-style-type: none"> • General 	<ul style="list-style-type: none"> ➤ The usual time between failures (MTBF) greater than 100,000 hours ➤ Working voltage : AC100~240V,DC5V2A, plug US/EU/UK/AU optional. ➤ Operating temperature : -40 +70 degree ➤ Operating humidity :0 -95 % non-condensing
<ul style="list-style-type: none"> • Package 	<ul style="list-style-type: none"> ➤ 1x 16 channels video transmitter ➤ 1x 16 channels video receiver ➤ 1x 3M FC/FC singlemode fiber patch cord ➤ Power supply adapters (plug US/EU/UK/AU available). ➤ User manual