





Features:

- 1. Support Analog cameras
- 2. Compatible for PAL, NTSC, SECAM Video format automatically.
- 3. With RS-485 data for remote control PTZ.
- 4. Transmission distance: Singlemode up to 20Km.
- 5. MTBF (Mean time between failure) over 100,000 Hours,

Description:

32 channels Video over a Fiber Optic Media Converters - for analog cameras. Long transmission distance S/M up to 20Km, with RS485 data for PTZ remote control. 1U 19" Rack mountable.

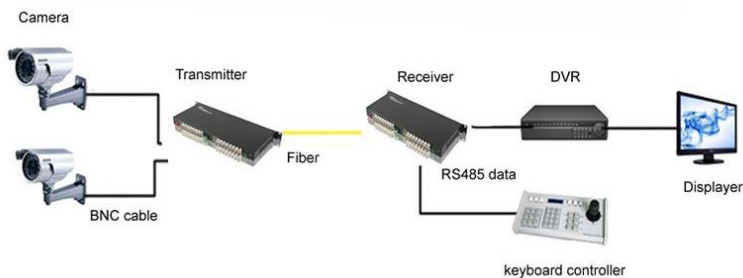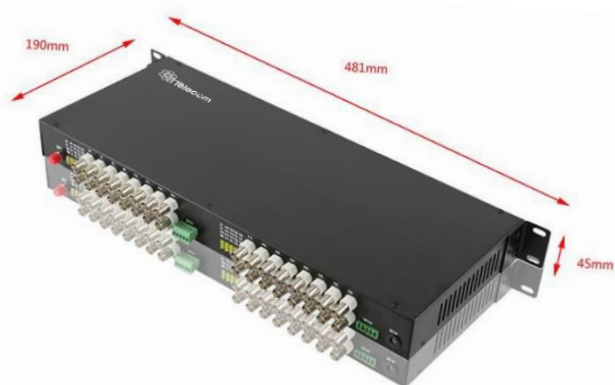

Technical Parameters:

<ul style="list-style-type: none"> • Applicable environment 	<ul style="list-style-type: none"> ➤ Long-distance radio and television transmission system ➤ Security Surveillance Systems ➤ Radio and television transmission ➤ Video monitoring ➤ Building control systems ➤ Train/High speed road monitoring
<ul style="list-style-type: none"> • Package 	<ul style="list-style-type: none"> ➤ 1x video transmitter ➤ 1x video receiver ➤ Power supply adapters (plug US/EU/UK/AU optional). ➤ Manual