

2U 19" Rack-mount Chassis

P/N : [ITT-MC4018](#)



Rack-mounted chassis is a centralized and economical equipment of gather Ethernet media converter together. It covers two styles, 14 slots and 16 slots, mostly used in plant room with centralized dual power supply and automatic switch.

Normal size is 2U, but 14 slots kind is for standalone device and 16 slots kind is for card style.

The ITTelecom 2U Chassis offers flexibility in installation and cost-effective scalable solution.

With an independent power supply on each slot, any converter is hot-swappable without causing an interruption to other converters. The media converters and power modules can be plugged and played anytime. Each bay of the media converter chassis can provide media conversion between fiber optic, phone wire and serial to copper lines.

ITTelecom Media Converter chassis with FT / GT Fast /Gigabit Ethernet Media converter series is an ideal solution to building a network solution of FTTC (Fiber to the Curb) and FTTB (Fiber to the Building) for ISPs, campuses and enterprises.

- Main and vice power equipment ensure system work smoothly.
- Function cards supports hot-plugging and each card realizes its corresponding function independently.
- Double power panel slot supports two power supply unit's backups for each other.
- It would enhance the reliability of the rack.
- Supports 220V/110V AC switch mode power supply (SMPS) design.
- Power supply and other parameter state indicator LED can monitor the operation condition of system.
- Up to 14 or 16 available card type media converter module slots, 14 standalone media converter slots.
- With stable performance, large capacity of power supply, and easy for management and maintenance.
- All of the modules installed in the chassis are hot-swappable, which makes it unnecessary to power-down the chassis when replacing modules.
- Support telecommunication operation requirement completely.

SERVICES:
Guaranteed Warranty



| | |
|----------------------------|---|
| Structure | ➤ 2U Rack |
| Ripple Wave | ➤ ≤20m |
| Power Input | ➤ AC85~265V 50/60HZ |
| Power Output | ➤ DC5V 16A |
| Power Adapter | ➤ Dual Power Supply |
| Working Environment | <ul style="list-style-type: none"> ➤ Operating Temperature: -10 ~ 55°C ➤ Storage Temperature: -40 ~ 70°C ➤ Relative Humidity: 5-95% (non-condensing) |
| Dimension | ➤ 485*245*90MM |
| Weight | ➤ 4.3KG |

2U 19"14 Slots Rack for Standalone Type Media Converter



2U 19"14 Slots Rack for Standalone Type Media Converter



2U 19"16 Slots Rack for Card Based Media Converter




2U 19"16 Slots Rack for Card Based Media Converter



SERVICES:
Guaranteed Warranty



Application:

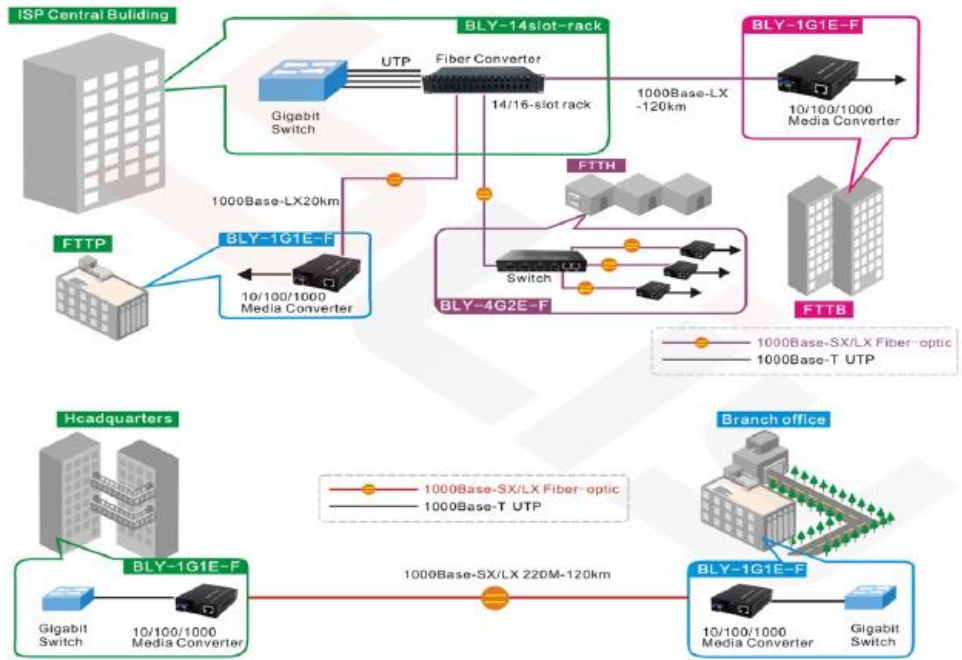

| | | |
|----------------------------|---|---|
| Product Model | ➤ ITT-2U-14slot | ➤ ITT-2U-16slot |
| Product Description | <ul style="list-style-type: none"> ➤ 14slot ➤ 2U 19" ➤ Dual power supply | <ul style="list-style-type: none"> ➤ 16slot ➤ 2U 19" ➤ Dual power supply |

SERVICES:
Guaranteed Warranty

