




Features:

- Support analog cameras , Automatically compatible for PAL, NTSC, SECAM Video format
- With RS-485 data (reverse direction) for remote control PTZ.
- MTBF (Mean time between failure) over 100,000 Hours, Lightning protection
- Plug and play.

Description:

This video over fiber system is used to send Two channels analog video signals over one fiber optic cable with FC/FC connector to remote display devices, Compatible with Singlemode fiber and Multimode fiber. Long working distance, Singlemode fiber up to 20Km (40Km/60Km/80Km/100Km optional), Multimode up to 2Km optional.

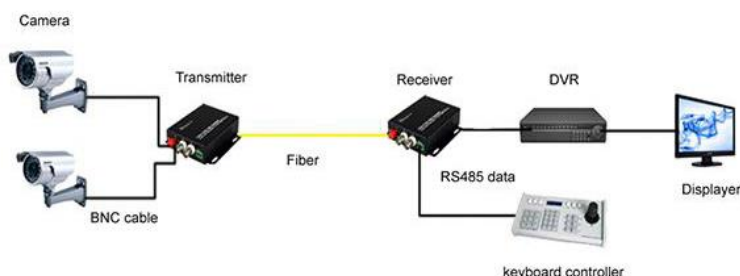

Technical Parameters:

<ul style="list-style-type: none"> • General Index 	<ul style="list-style-type: none"> ➢ The usual time between failures (MTBF) greater than 100,000 hours ➢ Working voltage : AC100~240V,DC5V2A, plug US/EU/UK/AU optional. ➢ Operating temperature : -40 +70 degree ➢ Operating humidity :0 -95 % non-condensing
<ul style="list-style-type: none"> • Data 	<ul style="list-style-type: none"> ➢ Type: RS-485 (2 wires), for remote control PTZ. ➢ Connector: industry terminal block.
<ul style="list-style-type: none"> • Optical index 	<ul style="list-style-type: none"> ➢ Optical interface : FC (SC optional) ➢ Transmission distance : single-mode fiber up to 20Km(12.4miles). Multimode fiber up to 2Km optional.
<ul style="list-style-type: none"> • Package 	<ul style="list-style-type: none"> ➢ 1x 2 channels video transmitter ➢ 1x 2 channels video receiver ➢ Power supply adapters (plug US/EU/UK/AU available). ➢ User manual