
n**osolet Ti**le

8-Ports Gigabit Ethernet SFP Switch (ITT-8GE2GF)




1



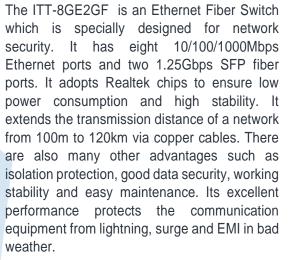

- Support Auto MDI-MDIX function
- 8 Ports 10/100/1000Mbps Ethernet with 2 Gigabit SFP
- Support IEEE802.3x pause frame-based and backpressure flow control
- Support 5-16V DC input
- Support Support IEEE 802.3x flow control and back pressure control
- Desktop with Fanless design

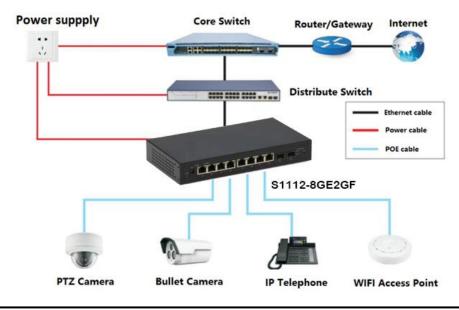







Specifications:	
Standard	IEEE 802.3 10Base-T
	IEEE 802.3u 100Base-Tx
	IEEE 802.3x flow control
	IEEE 802.3ab 1000Base-T
	IEEE 802.3z 1000Base-X
	IEEE802.3x Flow control
	IEEE802.1p QoS
	IEEE802.1d Spanning Tree
	IEEE802.3q VLAN
Switch Properties	> MAC Table: 4K
	Packet Buffer: 1M
	Backplane Bandwidth: 20Gbps
	Max Frame Size: 10K bytes
	Time delay < 20μs
Interface	Electrical Port: 8 10/100/1000Base-T (RJ45,)
	Optical Port: 2 1000Base-X (SFP)
LED Indicator	> Power LED: PWR
	Interface LED: RJ45(Link&ACT)
Power	Power Terminal: 10A plug
	Power Input: 100~240V AC/DV12
	Full load power consumption: <5W
Physical Characteristics	Housing: Metal, fanless
	Dimensions : 215mm x 107mm x 26.mm(W×D×H)
	Weight: 0.5kg
	Mounting: desktop
Environmental Limits	Operating Temperature: -15 to 45°C
	Storage Temperature: -30 to 70°C
	Ambient Relative Humidity: 5 to 95% (non-condensing)

Ordering Information

Product model	➢ ITT-8GE2GF
Product descriptions	8*10/100/1000Base-TX +2*1000Base-X (SFP) Unmanaged Desktop Ethernet SFP Switch

SERVICES: Guaranteed Warranty



